
RIO GRANDE®
Since 1944

Sharing your passion for making jewelry.
Products. Service. Know-how.

Preparing the Jeweler's Saw

1. Insert saw blade by loosening the top red nut. Insert the blade flat with teeth pointed down; then retighten the red nut.
2. Insert the blade into the bottom holder; apply tension while tightening the red nut.
3. If the saw blade needs to be turned in 90° increments, refer to the diagram at right.

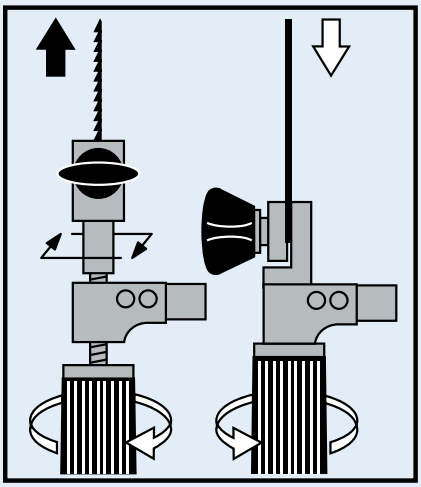

©2012 The Bell Group, Inc. All rights reserved.